




Espace Eiffel – Lot D6  
 19 & 21, avenue Gustave Eiffel  
 28630 - Gellainville FRANCE  
 Tel. : 02 37 33 37 10  
 Fax : 02 37 33 37 17  
 www.vartools.com

## 360° Swivel Head Hand Riveter DV-17300


### Anchor Riveting Tools:

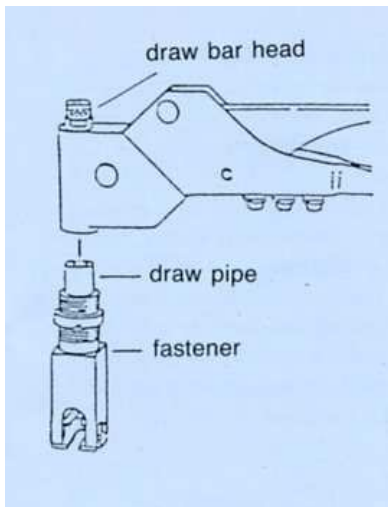

- 1/ Drill a hole in workpiece first.
- 2/ Release the handle.
- 3/ Replace the anchor you need.
- 4/ Put the anchor in the fastener and set into hole of the workpiece.
- 5/ Tighten is the handle. If the anchor not tight enough with the workpiece, remove the tool and tighten the anchor screw.
- 6/ Repeat procedure 4&5 until the anchor is tight enough.
- 7/ Release the handle and remove the tool.


**Caution** : For fastener assembly fasten the draw pipe first then fasten the fastener.

### Nut Riveting Tools:

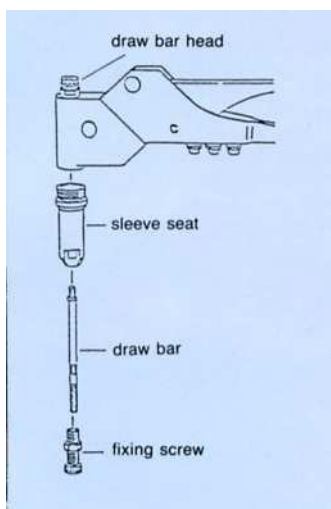

- 1/ Drill a hole in workpiece first.
- 2/ Replace the draw bar you need.
- 3/ Release the handle. Fix the draw bar with wrench and fasten fixing screw.
- 4/ Fasten the nut to the draw bar and set into hole of the workpiece.
- 5/ Tighten the handle, if the nut is not tight enough with the workpiecen just release the handle to fasten the draw bar head, then tighten the handle again.
- 6/ Release the handle and draw bar head to makr the nut and draw bar seperate.And the nut will be inserted in the workpiece.

## Riveter :

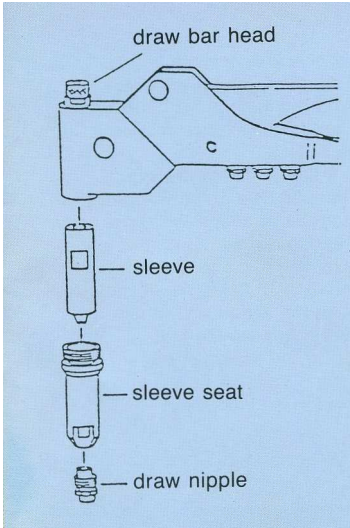

1/ Drill a hole in workpiece first.

2/ Select the draw nipple you need.(To fit the rivet).

3/ Release the handle.

4/ Put the rivet in the draw nipple of the riveter and set into hole of the workpiece.

5/ Tighten the handle. Mandrel will be auto cut off after 1 or 2 operations.

6/ Release the handle and clean the mandrel from the draw nipple after work completes.

